
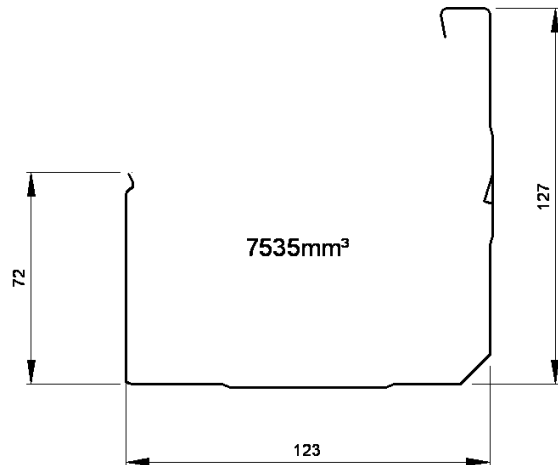


SQUARELINE 125 – SLOTTED HIGH FRONT GUTTER

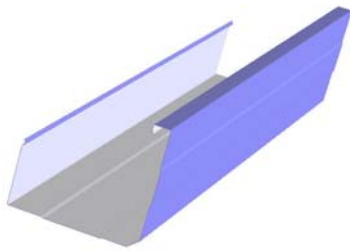

USE:	Residential, Industrial and Commercial projects Re-Roofing Projects		
QUALITIES:	High tensile steel supplied by Bluescope Steel Limited High front designed to hide edge of roof sheets or tile edges Slotted to allow water to escape during intense rainfall Available in all COLORBOND® colours & ZINCALUME®		
PERFORMANCE:	Designed to achieve Gutter requirements in BCA 2010 Section 3.5.2 Capable of carrying in excess of 50m ² of roof area per downpipe in SE QLD		
DESIGN:	Height	127mm	
	Overall Width	123mm	
	Lengths	Made to order up to 8 mtr	
	Cross sectional area	7535 square mm	
PROPERTIES:	ZINCALUME® alloy coated AZ150 conforms to AS1397 COLORBOND® coated steel in accordance with AS2728 – Category 3 A plastic film protects this product from scratches during fixing		
	Base Metal Thickness BMT (mm)	-	0.42
	Tensile Strength (MPa)	-	550
	Mass (kg/lineal mtr)	ZA CB	1.20 1.22
INSTALLATION:	Allow for gutter “fall” of at least 1 in 500 from the designated high points		
PANTEX FASCIA:	Sqaureline 125 can be fixed to Pantex metal fascia with Spring Clips & Overstraps <ul style="list-style-type: none"> - Spring clips should be spaced every 900mm - Overstraps should be located mid point between each spring clip 		
OTHER FASCIA:	Use internal gutter brackets spaced at 900mm for metal or timber fascia Remove plastic coating from finished installation		
ACCESSORIES:	Spring Clips Overstraps Internal gutter brackets Stop ends – left and right hand Internal and external corners		