

PROPERTIES

DESIGN

GIRTH	100mm - 1200mm
LENGTHS	Custom - 0.5m up to 8m
MINIMUM FOLD DIMENSION	10mm

QUALITIES

- ✓ For most standard residential projects and applications
- ✓ Made from Low Tensile G300 steel to assist cutting on site
- ✓ Custom manufactured
- ✓ Available in all COLORBOND® steel colours and ZINCALUME® steel
- ✓ Available in 0.40mm BMT and 0.55m BMT

- ZINCALUME® steel alloy coated AZ150 conforms to AS1397
- COLORBOND® steel coated in accordance with AS2728 – Category 3


Base Metal Thickness BMT (mm)	0.40	0.55
Tensile Strength (MPa)	300	300
With Corestrip	ZA CB	No Yes

HOW TO ORDER

1. Choose your preferred profile type, material and finish
2. If using COLORBOND® steel, nominate the side on which the colour is required
3. Specify dimension by letters shown in the diagrams. A larger image can be viewed on our website.
4. Nominate the angles on all bends
5. Nominate the quantity and length of the flashing

Example:

1. Type 4, Colour Surfmist
2. Colour on Side C
3. A-15mm, B-100mm, C-150mm, D-150mm
4. CB - 90°, CD - 90°, AB - 65°
5. 1 of, 2550mm

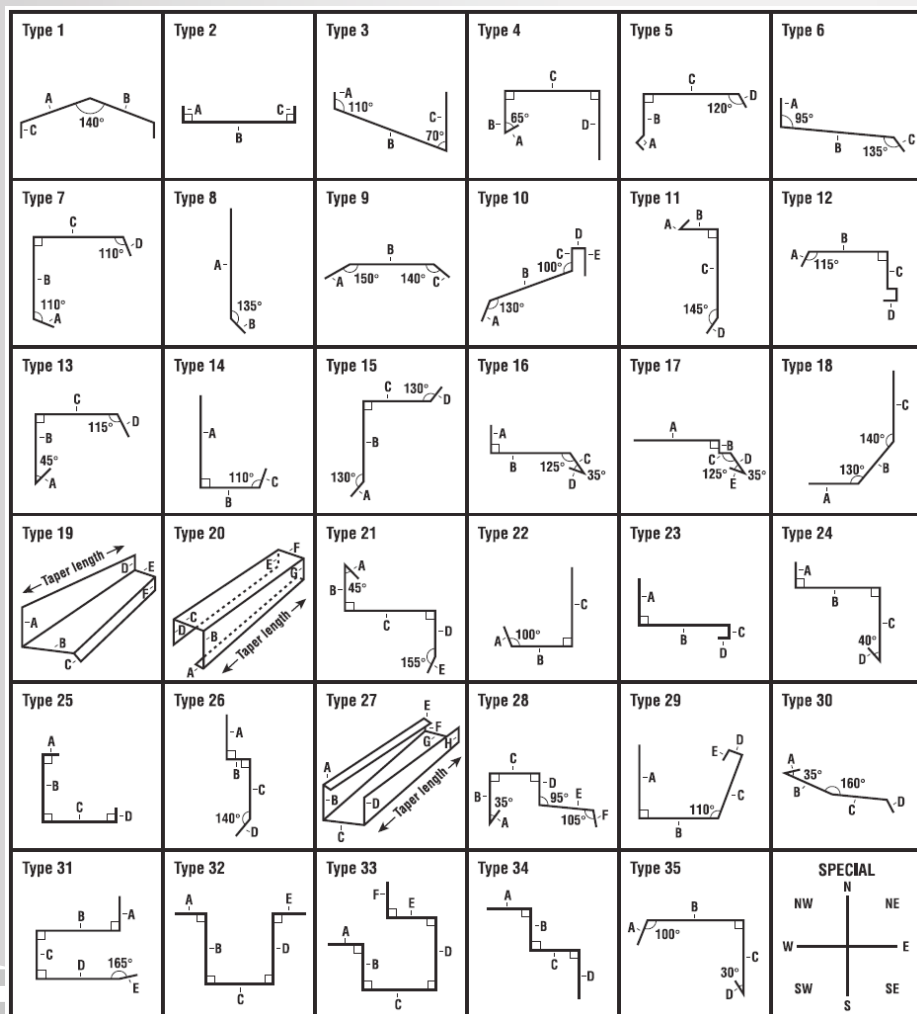

Next Day Delivery*

*For residential quantities